

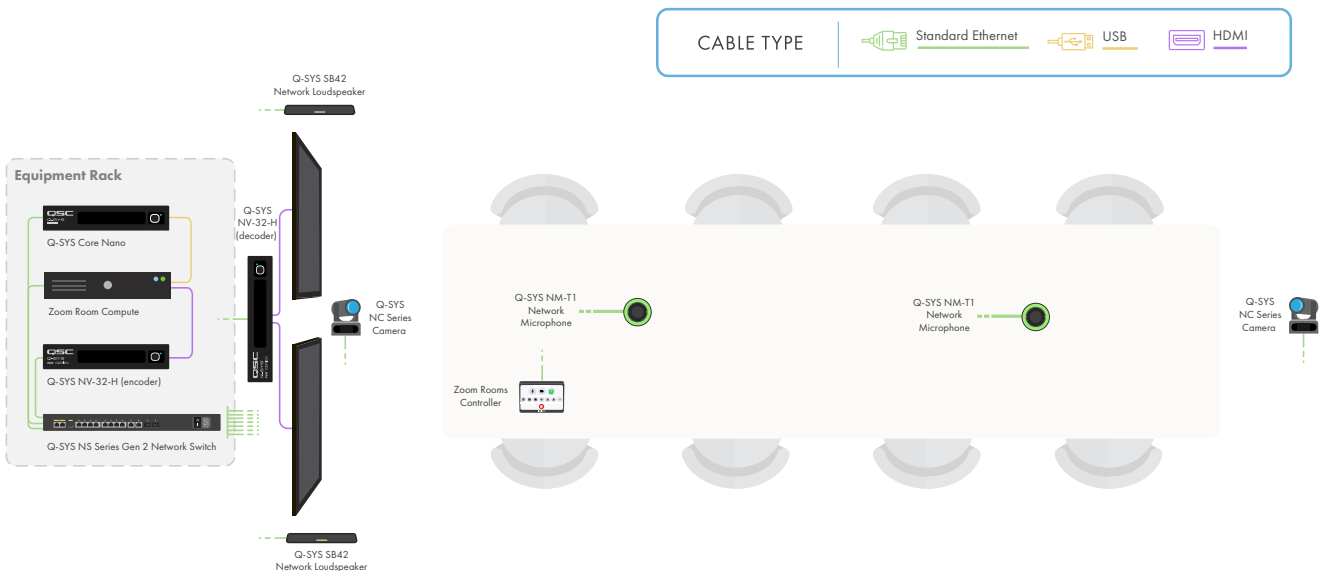
Solutions Overview Guide







Meeting Room Solution: Medium & Small Conference Rooms

Medium Conference Room

Bring the Zoom Rooms experience to your mixed-sized conference rooms with Q-SYS. Our extensive portfolio of Zoom Certified devices enables designing to the needs of the room, including loudspeaker options for in-ceiling, open ceiling, and directional audio requirements. In addition to audio processing, the Q-SYS Core Processor supports multi camera switching, automation, and room control.

- The Q-SYS Core Nano Processor is the hub of the system. It connects to the Zoom Rooms Compute with a single driverless USB connection for audio and video.
- The Certified Zoom Rooms sample design provides certified audio settings for Zoom Rooms, including advanced configurable acoustic echo cancellation (AEC) and noise reduction delivering echo free audio even in the most challenging rooms.
- Q-SYS NC-12x80, network PTZ camera, uses the power of the network allowing you to add as many Q-SYS network conference cameras in the space providing multiple points of view to frame the right shot.
- Q-SYS NL-SB42 is a network PoE soundbar that delivers clear speech and music reproduction natively to Q-SYS. It features a two-way design that provides wide off-axis response, and is optimized to better handle program content (in addition to voice content). The Q-SYS NL-SB42 supports vertical or horizontal mounting and can be integrated into your space with a single Ethernet cable to reduce overall hardware footprint and lower system cost.
- Q-SYS NV Series video endpoint allows multi-stream video encoding or decoding for network-based HDMI video distribution.
- Q-SYS NM Series NM-T1 is a tabletop network PoE microphone native to Q-SYS and ideal for the collaboration space. The microphone features advanced beamforming technology that ensures optimal clarity and separation for all surrounding talkers. It also offers onboard call controls, programmable user button and touchless muting capability, which lets users mute or unmute with the wave of a hand. As a native Q-SYS Product, the NM-T1 integrates seamlessly into your Q-SYS system without the need for complex programming.



Product	Quantity	
Q-SYS Core Nano Processor	1	
Q-SYS NS10-125+ Network Switch	1	
Q-SYS NV-32-H Network Video Endpoint	2	
Q-SYS NL-SB42 Network Soundbar	2	
Q-SYS NM-T1 Tabletop Microphone	2	
Q-SYS NC-12x80 Network Camera	1	

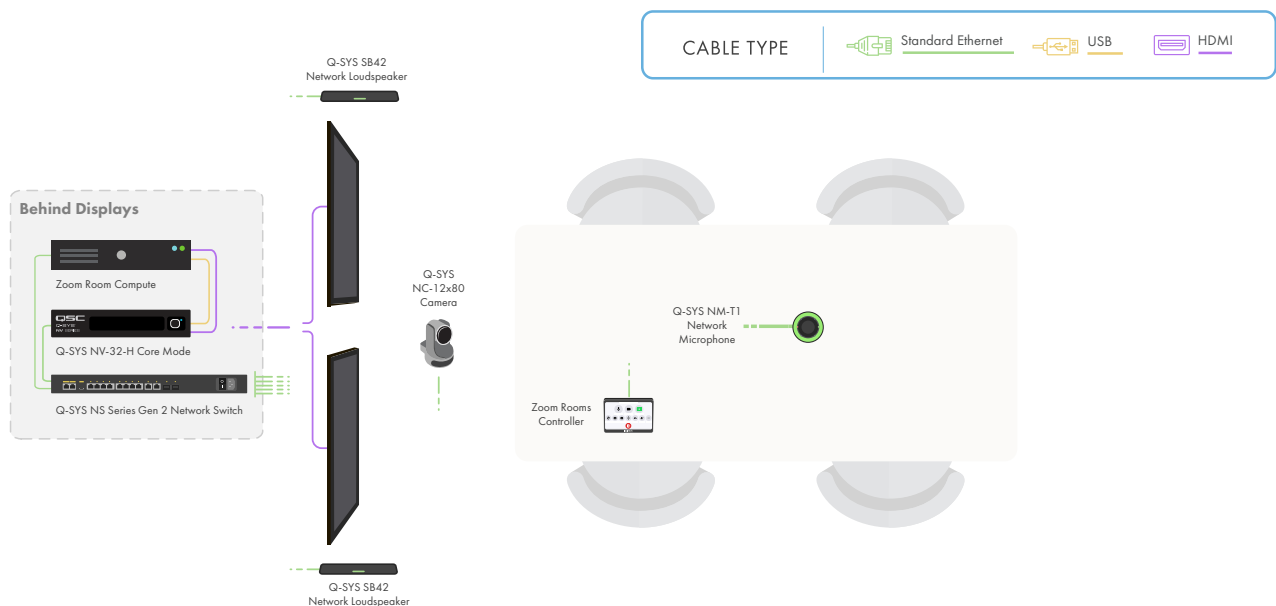
Solutions Overview Guide





Meeting Room Solution: Medium & Small Conference Rooms

Small Conference Room

Bring the Zoom Rooms experience to your mixed-sized conference rooms with Q-SYS. Our extensive portfolio of Zoom Certified devices enables designing to the needs of the room, including loudspeaker options for in-ceiling, open ceiling, and directional audio requirements. In addition to audio processing, the Q-SYS Core Processor supports multi camera switching, automation, and room control.

- The NV-32-H (Core Capable) is a multipurpose, software-configurable video endpoint native to the Q-SYS Platform. Depending on the application, the NV-32-H configured in **'Core Mode'** transforms the device into a fully integrated Q-SYS processor with local HDMI switching capabilities. The NV-32-H also seamlessly connects Q-SYS network camera and audio feeds via a driverless USB connection.
- The Certified Zoom Rooms sample design provides certified audio settings for Zoom Rooms, including advanced configurable acoustic echo cancellation (AEC) and noise reduction delivering echo free audio even in the most challenging rooms.
- Q-SYS NC-12x80, network PTZ camera, uses the power of the network allowing you to add as many Q-SYS network conference cameras in the space providing multiple points of view to frame the right shot.
- Q-SYS NL-SB42 is a network PoE soundbar that delivers clear speech and music reproduction natively to Q-SYS. It features a two-way design that provides wide off-axis response, and is optimized to better handle program content (in addition to voice content). The Q-SYS NL-SB42 supports vertical or horizontal mounting and can be integrated into your space with a single Ethernet cable to reduce overall hardware footprint and lower system cost.
- Q-SYS NM Series NM-T1 is a tabletop network PoE microphone native to Q-SYS and ideal for the collaboration space. The microphone features advanced beamforming technology that ensures optimal clarity and separation for all surrounding talkers. It also offers onboard call controls, programmable user button and touchless muting capability, which lets users mute or unmute with the wave of a hand. As a native Q-SYS Product, the NM-T1 integrates seamlessly into your Q-SYS system without the need for complex programming.



Product	Quantity	
Q-SYS NV-32-H in Core Mode	1	
Q-SYS NS10-125 Network Switch	1	
Q-SYS NL-SB42 Network Soundbar	2	
Q-SYS NC-12x80 Network Camera	1	
Q-SYS NM-T1 Tabletop Microphone	1	